

# STANDARD PRODUCTS TRIPLE-PLY SEALED BEARING UNITS (UCL3, NAL3 & UCXL3)



L3-type Seal




IPTCI Triple-ply (L3) Sealed bearings provide more protection in harsh environments. They are often an ideal choice for dirty, high-moisture applications such as those found in agriculture, turf, and car washes. From 3/4" to 3" bore, and metric sizes 20mm to 60mm, IPTCI L3 inserts are available in a wide range of styles and in set screw locking or eccentric locking collar.

## L3 performance advantages:

- Resistance to contamination
- Retention of lubrication



## L3 Seals also available on these IPTCI units.

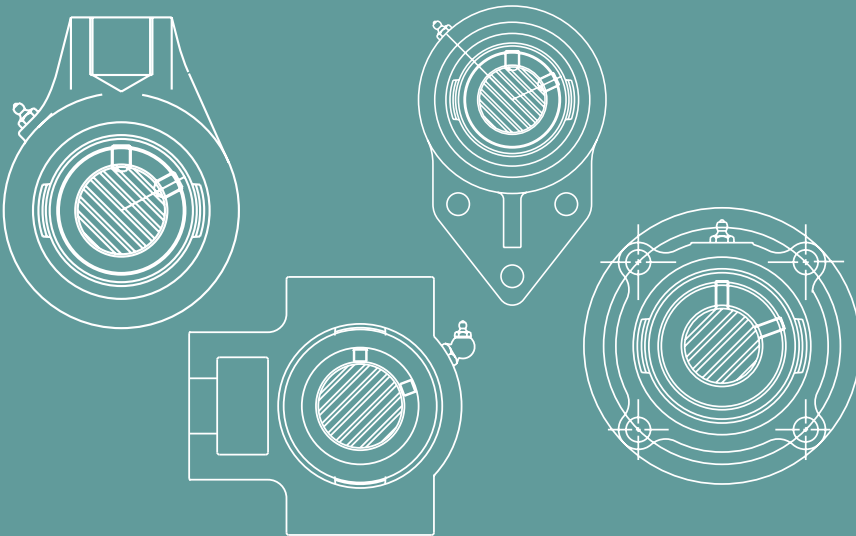

## Maximum Operating Speed

Size	Standard Duty		Medium Duty		RPM
	UC L3	NA L3	Size	UCX L3	
204	3/4", 20mm	3/4"	-	-	1210
205	1", 25mm	1"	-	-	1010
206	1 1/8", 1 3/16", 1 1/4"S, 30mm	1 3/16", 1 1/4"S	X05	1"	850
207	1 1/4", 1 3/8", 1 7/16", 35mm	1 1/4", 1 3/8", 1 7/16"	X06	1 1/4"	730
208	1 1/2", 40mm	1 1/2"	X07	1 7/16"	650
209	1 5/8", 1 11/16", 1 3/4", 45mm	1 5/8", 1 11/16", 1 3/4"	X08	1 1/2"	600
210	1 15/16", 2"S, 50mm	1 15/16", 2"S	X09	1 3/4"	540
211	2", 2 3/16", 55mm	2", 2 3/16"	X10	1 15/16", 2"	500
212	2 7/16", 60mm	2 7/16"	X11	2 3/16"	450
213	2 1/2"	-	X12	2 7/16"	420
214	-	-	X13	2 1/2"	400
215	2 15/16", 3"	2 15/16", 3"	-	-	380
216	-	-	X15	2 15/16", 3"	350

**IPTCI**  
BEARINGS®

9675 West 76th Street, Suite 130  
Minneapolis, MN 55344

800 328 8153

952 224 7030

fax 952 224 7039

sales@IPTCI.com

For mounted unit selection,  
dimensional data, load ratings,  
materials and pricing, visit

**IPTCI.com.**